

DOGBONE

Excellent Global Performance even on Difficult-To-Tag Materials

SMARTRAC's DogBone inlays and tags are designed for global supply chain, industrial, RTI and sports timing applications, and offer excellent performance in demanding environments and on different materials.

DogBone inlays and tags have a good tolerance to the detuning effect of high-electric materials, providing effective global performance even on difficult-to-tag materials. They are available with the NXP UCODE 7 chip that offers unique TID, enables pre-serialized EPC and parallel encoding, and provides a product status flag.

The inlay is size-optimized for 100 mm / 4 inch wide converted labels, and is available in dry, wet and paper tag delivery formats.

SMARTRAC's inlays and tags are compliant with ISO 9001:2008 Quality Management and ISO 14001:2004 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.

Overview

Operating Frequency
860 - 960 MHz

Integrated Circuit (IC)
NXP UCODE 7

Antenna Size
94 x 24 mm (3.7 x 0.9 in)

Die-cut Size
97 x 27 mm (3.8 x 1.1 in)

International Standards

▶ EPC Class 1 Gen 2
ISO 18000-6C

Application Areas

- ▶ Industry
- ▶ Sports Timing
- ▶ Supply Chain Management

Guadalajara:

(33) 4162.2261 ext. 115, 105, 106.
ingenieria@adises.com.mx / soportegd@adises.com.mx
soporte@adises.com.mx

México:

(55) 5318.2309 ext. 107
soportemex@adises.com.mx

Monterrey:

(81) 2263.5132 ext. 305
soportemty@adises.com.mx




DOGBONE

Excellent Global Performance even on Difficult-To-Tag Materials


Technical Features			
IC + Memory NXP UCODE 7 128 bit EPC	Size 97 x 27 mm / 3.8 x 1.1 in	Format* Wet Paper Tag	Sales Code 3003020 3003021
Web Width	100 mm / 3.9 in		
Operating Temperature	-40 °C to +85 °C / -40 °F to +185 °F		
Adhesive	Acrylic, water borne adhesive & solvent-free permanent adhesive		
Qty/Reel	3,000 pcs / 5,000 pcs / 10,000 pcs.		
Core Size	76 mm / 3 in		
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing		

*Note: Other formats are available upon request.

Read Range (m)

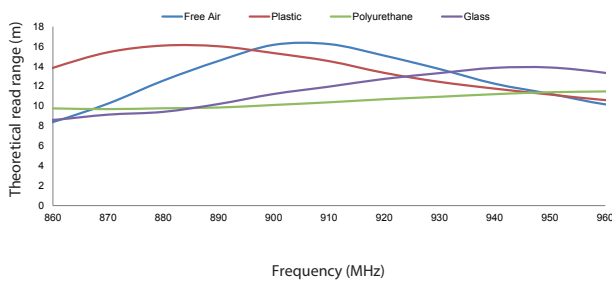

Orientation Sensitivity



All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level.

SMARTRAC N.V. Strawinskylaan 851 1077 XX Amsterdam The Netherlands
Phone: +31 20 30 50 150 Fax: +31 20 30 50 155 info@smartrac-group.com

Contact: Sales & Customer Service
www.smartrac-group.com/contact



© 2017 SMARTRAC N.V.
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.