

# SWIFT®

## Intelligent Wireless Modules



### Intelligent Wireless Devices

#### General

Fire-Lite Alarms' SWIFT® wireless modules are intelligent (addressable) modules which provide secure, reliable communication to the Fire Alarm Control Panel (FACP) across a Class A mesh network. Wireless modules create an opportunity for applications where it is costly (concrete walls/ceilings, buried wires), obtrusive (surface mount conduit), or possibly dangerous (asbestos) to use traditional wired devices. In addition, both wired and wireless devices can be present on the same FACP providing an integrated wired-wireless solution for increased installation potential.

The mesh network within the SWIFT system creates a child-parent relationship between the devices so that each device has two parents providing a second path for communications on every device. If one device can no longer operate for any reason, the rest of the devices can still communicate with each other, directly or through one or more intermediate devices.

The SWIFT system also engages frequency hopping to prevent system interference whether intentional or accidental.


The SWIFT monitor module is intended for use with a wireless gateway to interface with a device having contacts used to signal status conditions. It is designed to provide an interface to contact devices such as security contacts, waterflow switches, or pull stations. The input to the monitor module is non-latching and does not require a reset. The device has a panel controlled LED indicator. The monitor module must be within 3-feet of the monitored device when using field wiring or 20 feet in non-metallic conduit.

The SWIFT relay module allows a compatible control panel to switch discrete contacts by code command. The relay contains an isolated set of Form-C contacts, which operate as a SPDT switch. Circuit connections to the relay are not supervised by the module. The SWIFT relay module can be used to activate functions such as a remote power supply (in conjunction with a monitor module), elevator recall, door holders and fan shutdown of wired devices or SWIFT devices within the same mesh network. The module also includes a panel-controlled LED indicator.

The devices communicate across the mesh network through a gateway to the FACP. The FACP views the SWIFT wireless device and another addressable device on the system providing similar detection functions and outputs as a wired counterpart. In addition, both wired and wireless devices can be present on the same FACP to meet the needs of a given application. A SWIFT wireless system can use any combination of modules, smoke, or heat detectors.

#### Features

- Wireless installation
- Class A mesh network
- Addressable code wheels
- Commercial applications
- UL 268 listed
- Frequency hopping
- Bi-directional communications

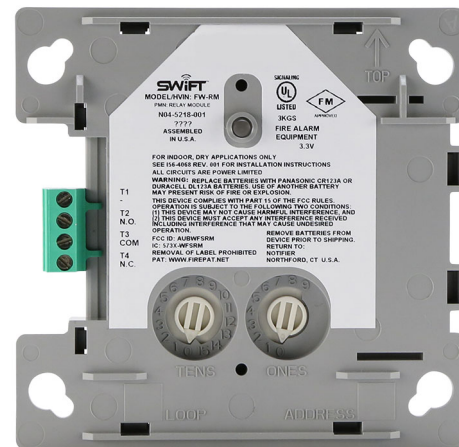

W-CRF Wireless Relay Module

#### Monitor Module Specifications

##### PHYSICAL / OPERATING SPECIFICATIONS

**Dimensions:** Height 4-1/2 inches; Width 4-1/2 inches; Depth 1-1/2 inches

**Device Weight (includes 4 batteries):** 7.9 oz (224 g)

**Operating Temperature Range:** 32°F to 120°F (0°C to 49°C)

**Operating Humidity Range:** 10% to 93% non-condensing

##### ELECTRICAL SPECIFICATIONS

**Maximum Operating Voltage:** 3.3 VDC

**Average Operating Current:** 210µA, 3.9 EOL

**Maximum Current Draw:** 5 mA (LED on)

**EOL Resistance:** 3.9K Ohms

**Maximum IDC Wiring Resistance:** 10 Ohms

**Maximum IDC Voltage:** 3.2 Volts

**Maximum Average IDC Current:** 5.5µA

**Maximum Transmit RF Power:** 17 dBm

**Radio Frequency Range:** 902-928 MHz

##### BATTERY SPECIFICATIONS

**Battery Type:** 4 Panasonic CR123A or 4 Duracell DL 123A

**Battery Life:** 2 years

**Battery Replacement:** Upon TROUBLE BATTERY LOW display and/or during annual maintenance

#### Relay Module Specifications

##### PHYSICAL / OPERATING SPECIFICATIONS

**Dimensions:** Height 4-1/4 inches; Width 4-1/4 inches; Depth 1-1/2 inches

**Operating Temperature Range:** 32°F to 120°F (0°C to 49°C)

**Operating Humidity Range:** 10% to 93% non-condensing

### ELECTRICAL SPECIFICATIONS

**Maximum Operating Voltage:** 3.3 VDC

**Average Operating Current:** 210µA

**Maximum Current Draw:** 5 mA (LED on)

**Maximum Transmit RF Power:** 17 dBm

**Radio Frequency Range:** 902-928 MHz

### BATTERY SPECIFICATIONS

**Battery Type:** 4 Panasonic CR123A or 4 Duracell DL 123A

**Battery Life:** 2 years

**Battery Replacement:** Upon TROUBLE BATTERY LOW display and/or during annual maintenance

### Relay Contact Ratings

Current Rating	Maximum Voltage	Load Description	Application
2 A	25 VAC	PF = 0.35	Non-coded
3 A	30 VDC	Resistive	Non-coded
2 A	30 VDC	Resistive	Coded
0.46 A	30 VDC	(L/R = 20ms)	Non-coded
0.7 A	70.7 VAC	PF = 0.35	Non-coded
0.9 A	125 VDC	Resistive	Non-coded
0.5 A	125 VAC	PF = 0.75	Non-coded
0.3 A	125 VAC	PF = 0.35	Non-coded

### Agency Listings and Approvals

Each device complies with part 15 of the FCC rules meaning operation is subject to two conditions.

1) The device may not cause harmful interference and 2) The device must accept any interference received including interference that may cause undesired operation.

The listings and approvals below apply to the basic intelligent wireless detectors. In some cases, certain modules may not be listed by certain approval agencies or listing may be in process. Consult factory for latest listing status.

**UL Listed:** S2424

**CSFM** (Monitor Module): 7300-0075:0233

**FM Approved**

**FCC ID:** (Monitor Module) AUBWF5MM and (Relay Module) AUBWF5RM

### Standards and Codes

The SWIFT Wireless Intelligent Detectors comply with the following UL Standards and with NFPA 72 Fire Alarm System requirements.

UL 864

UL 268

### Ordering Information

**W-MMF:** Wireless monitor module for use with the W-GATE wireless gateway. Includes a special cover with a tamper magnet built in. Recommended for installation in a SMB500 box (ordered separately) rather than a metal backbox for best performance. Ships with 4 Panasonic CR123A or 4 Duracell DL123A batteries.

**W-CRF:** Wireless relay module for use with the W-GATE wireless gateway. Includes a special cover with a tamper magnet built in. Recommended for installation in a SMB500 box (ordered separately) rather than a metal backbox for best performance. Ships with 4 Panasonic CR123A or 4 Duracell DL123A batteries.

**W-GATE:** LiteSpeed™ Wireless Gateway

**W-DIS-D:** LCD user interface for use with the W-GATE wireless gateway and an ANN-80W Remote Annunciator.

**ANN-80-W:** White 80 character LCD annunciator.

**W-USB:** Wireless USB radio/antenna dongle that plugs into the USB port of a PC running SWIFT Tools.

**SMB500:** Optional surface-mount backbox.

Fire-Lite® Alarms and SWIFT® are registered trademarks of and LiteSpeed™ is a trademark of Honeywell International Inc. ©2015 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire-Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
www.firelite.com